



CUSTOMER	CUST P/N	P/N	<b>RoHS Compliant</b>			REV	ZONE	LTR	DESCRIPTION	DATE	REV/SER	APPD
1	2	3				4	5	6	7	8		

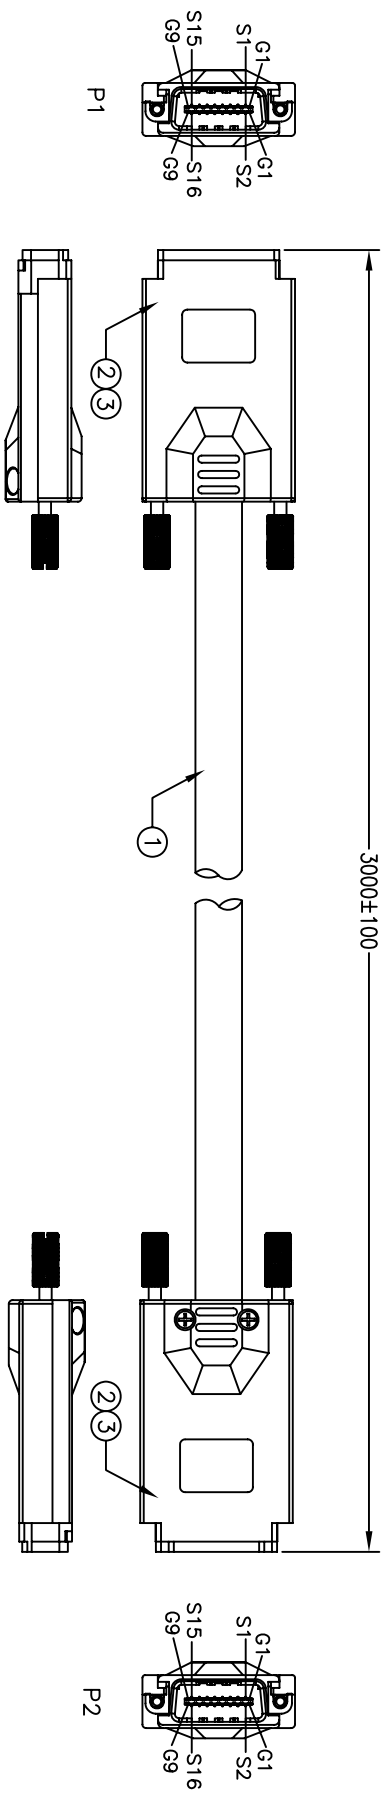

PIN ASSIGNMENT:

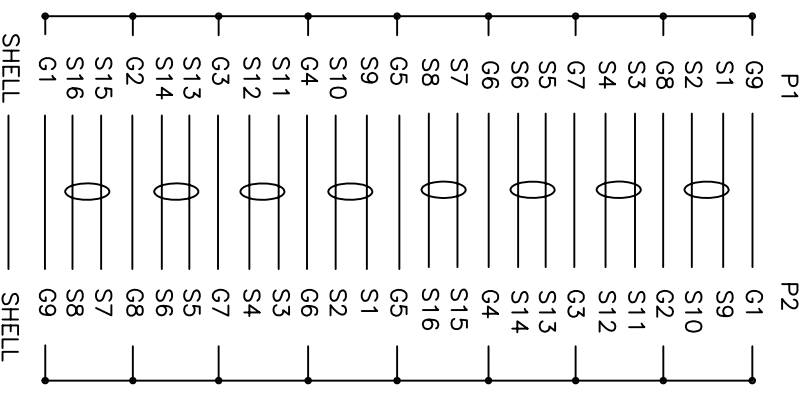

**Electrical character:**

- a. 100% open & short testing.
- b. Withstanding voltage: DC 300V 0.01Sec.
- c. Insulation resistance: 10M Ohm(Min).
- d. Conductive resistance: 2 Ohm(Max).

3	INNERMOLD	LOW DENSITY PE	
2	CONN	SAS 4x PLUG CONNECTOR	
1	CABLE	Infiniband CABLE UL20276 (2C+D+AL+ML)*8C+ MYLAR+AL +B+P BLACK PVC JACKET OD: 7.5mm	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE

INNERMOLD	<input checked="" type="checkbox"/>	TOLERANCE UNSPECIFIED	深圳市联发讯电子科技有限公司
OVERMOLD	<input checked="" type="checkbox"/>	ANGLE	SCALE
		±	NON
		±	UNIT
		±	mm
		±	SHEET
		±	1/1

DESIGNER:	Sky	NAME	SAS 4X CABLE
CHECKED:	Kobe	SCALE	NON
APPROVED:	Dreck	UNIT	mm
		SHEET	1/1
		REV	0.1
DRAWING NO.	XH-SAS4X01-001		